



IP22 Class II (V)

Product Features


- Meets medical & I.T.E. safety
- 2 MOPP input to output isolation
- Energy efficiency level VI
- Touch current ≤ 100µA
- ≤ 0.075W standby power
- Up to 5,000m operating altitude



Models & Ratings

Model Number	Voltage ^(*) (V)	Current (A)	Rated Power	Ripple & Noise (max)	Voltage Tolerance	Line & Load Regulation	Efficiency (Average)	Start Up Delay
UES24LZ1-120YYYYSPA	12.0	0.01-2.00	24.00W	150mVpk-pk	±5%	Line:±1% Load:±5%	86.8%	≤3s

Mechanical Details

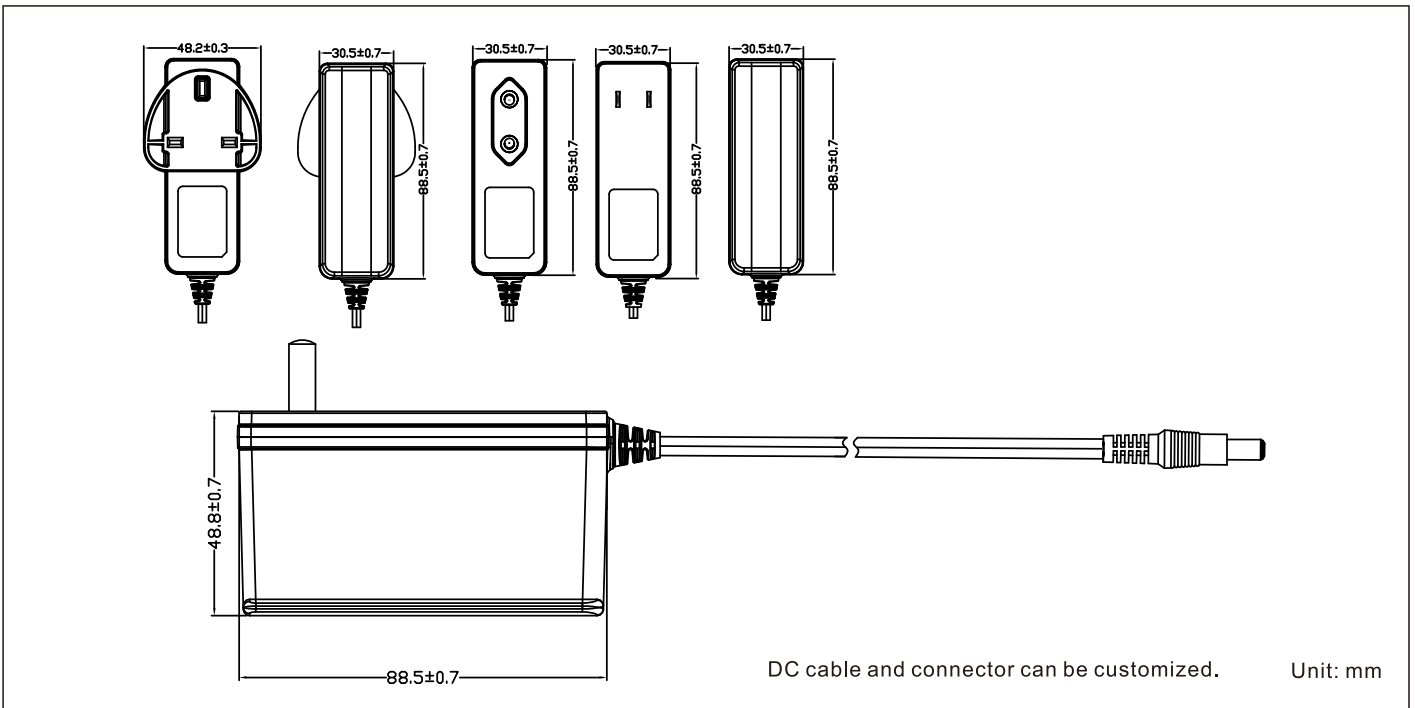

Notes
(*) Other options are available, please contact our sales representative for details.

Input

Input Voltage Range	80-264VAC
Frequency Range	47-63Hz
Input Current	0.8A at 80VAC
Touch Leakage Current ^(max)	≤ 100µA at 264VAC

Environmental

Operating Temperature	0°C to 45°C
Storage Temperature	-20°C to 60°C
Operating Humidity	10% to 90% RH, non-condensing
Storage Humidity	5% to 90% RH
Operating Altitude	5,000m

General

Dimensions	88.5(L) 30.5(W) 48.8(H)mm
Weight	128g
MTBF	>100,000hrs MIL-HK8K-217 at 25°C

Protection

Overload	110-200% rated output power, auto recovery
Over Voltage	110-150% rated output voltage input to reset
Short Circuit	Trip and restart (hiccup mode)

Safety Approvals

Safety Agency / Mark	Medical	ITE
CCC	-	GB4943.1
CB	IEC60601-1	-
TüV Rheinland/Mark	EN60601-1	-
UL	ANSI/AAMI ES 60601-1 CAN/CSAC22.2NO.60601-1	-

EMC

Emissions	Medical	ITE
Conducted	IEC/EN 60601-1-2, CISPR 11	EN55032, CISPR 32
Radiated	IEC/EN 60601-1-2, CISPR 11	EN55032, CISPR 32
Harmonic Currents	EN61000-3-2, Class A	EN61000-3-2, Class A
Voltage Flicker	EN61000-3-3	EN61000-3-3
Immunity	IEC/EN 60601-1-2	EN55035, CISPR 35
ESD	EN61000-4-2	±15KV air, ±8KV contact
Radiated Immunity	EN61000-4-3	10V/m, 3V/m 80MHz - 2.7GHz
EFT/Burst	EN61000-4-4	±2KV on AC port, ±1KV on signal ports
Surge	EN61000-4-5	±1KV line to line (different mode)
Conducted Immunity	EN61000-4-6	3Vrms, 6Vrms (0.15MHz-80MHz)
Magnetic Field	EN61000-4-8	30 A/m
Dips & Interruptions	EN61000-4-11	0%, 70%, 0% of UT

Others

Dielectric Withstand Voltage	5,656VDC input to output
Insulation Resistance	10M Ohms, 500VDC input to output